Mini / Flash/Buzzer 423 Buzzer/Flash WM Contin/pulse 24VAC/DC RD



Part No.: 423.110.75

CE	ŬΚ
	CA

MECHANICAL DATA Height 121 mm Diameter 83 mm Materials PC Dome colour Red Housing colour Grey Protection category IP65 Connection Screw terminals cross-sectional area maximum 1.50mm² / 16AWG Membrane grommet Cable entry Cable entry minimum d = 1 mmCable entry maximum d = 9 mmTension relief Pull-out protection Type of fixing Wall mounting Working temperature minimum -20°C Working temperature maximum +50°C Weight with packaging 173 g Product weight 142 g **ELECTRICAL DATA** Operating voltage 24V Operating voltage type AC/DC Operating voltage frequency 50Hz +/- 10% Operating voltage tolerance Rated operational voltage 24 VDC Rated operational current 120 mA 120 mA Rated inrush current Protection class 2 Protection class Pollution degree 3 **OPTICAL DATA** Light source Xenon Light colour Red Optical signal image Flash Flash frequency 1 Hz Flash output 1 J Service life optical 4 million flashes minimum **ACOUSTIC DATA**

Volume (max) at 1m distance

92,0 dB (A)


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Mini / Flash/Buzzer 423 Buzzer/Flash WM Contin/pulse 24VAC/DC RD

Acoustic signal image	Continuous tone	
	Pulse tone	
Audio frequency	2300 Hz	
Acoustic service life	5,000 h minimum	
APPROVAL DATA		
Conforms with CE	Yes	
Conforms with RoHS directive	Yes	
WEEE	Yes	
Conforms with ATEX-directive	No	
Conforms with CCC	No	
Conforms with UL	No	
Conforms with FCC	No	
Conforms with IC	No	
EAC certificate available	Yes	
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)	
Conforms with AS-I	No	
ICAO Certification	No	
Conforms with DNV	No	
Conforms with RoHS CN	No	
Conforms with VdS	No	

Provide the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Mini / Flash/Buzzer 423 Buzzer/Flash WM Contin/pulse 24VAC/DC RD

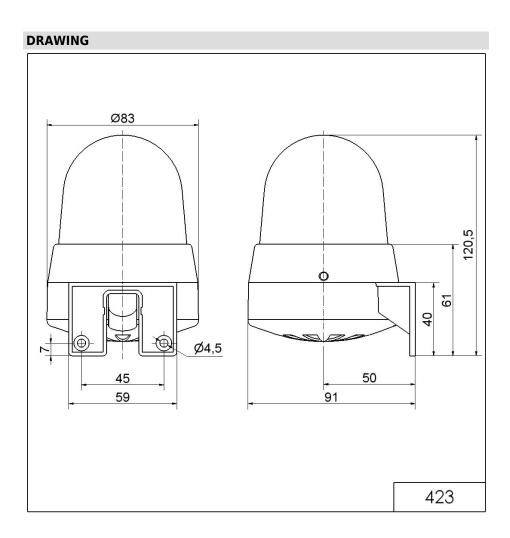

Pror additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.