KombiSIGN 70 / LED EVS Element 843 LED EVS element 24VDC CL



ļ

Part No.:	843.440.55		
Series:	KombiSIGN 70		
MECHANI	CAL DATA		
Height		66 mm	
Diameter		70 mm	
Materials		PC	
Dome colour		Clear	
Protection category		IP54	
Working temperature minimum		-20°C	
Working temperature maximum		+50°C	
Weight with packaging		92 g	
Product weight		77 g	
ELECTRIC	AL DATA		
Operating voltage		24V	
Operating voltage type		DC	
Operating voltage tolerance		+/- 10%	
Rated operational voltage		24 VDC	
Rated operational current		250 mA	
Rated inrush current		500 mA	
Protection class		Protection class 2	
Pollution degree		3	
OPTICAL I	DATA		
Light source		LED	
Light colour		White	
Optical signal image		EVS	
Service life optical		50,000 h maximum	
APPROVA	L DATA		
Conforms with CE		Yes	
Conforms with RoHS directive		Yes	
WEEE		Yes	
Conforms with ATEX-directive		No	
Conforms with CCC		No	
Conforms with UL		cULus	
UL Type Rating		Type 12	
Conforms with FCC		No	
Conforms with IC		No	
EAC certificate available		Yes	
Conforms with UKCA (Importer)		Yes (WERMA (UK) Ltd.)	
Conforms with CMIM		No	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.


ļ



KombiSIGN 70 / LED EVS Element 843 LED EVS element 24VDC CL

Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

DRAWING

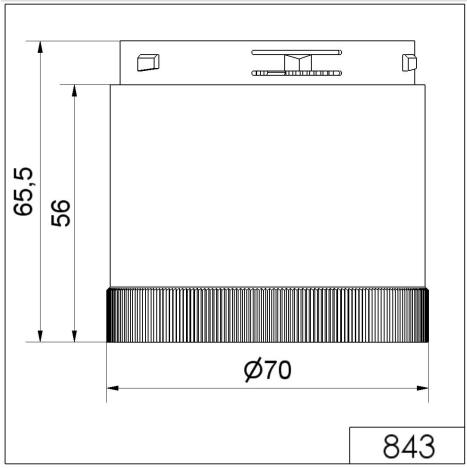

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.