KombiSIGN 71 / LED Perm. light ultrabright 644 LED Perm. light ultrabright 24VDC RD



ļ

-	644.180.55	
Series:	ies: KombiSIGN 71	
MECHANI	CAL DATA	
Height		66 mm
Diameter		70 mm
Materials		PC
Dome colour		Red
Protection category		IP65
Working temperature minimum		-20°C
Working temperature maximum		+50°C
Weight with packaging		82 g
Product weight		67 g
ELECTRIC	AL DATA	
Operating voltage		24V
Operating voltage type		DC
Operating voltage tolerance		+/- 10%
Rated operational voltage		24 VDC
Rated operational current		195 mA
Rated inrush current		500 mA
Protection class		Protection class 2
Pollution degree		3
OPTICAL DATA		LED
Light source		Red
Light colour		Permanent
Optical signal image Service life optical		50,000 h maximum
Service me	optical	50,000 11 11/2/11/011
APPROVA		
Conforms with CE		Yes
Conforms with RoHS directive		Yes
WEEE		Yes
Conforms with ATEX-directive		No
Conforms with CCC		No
Conforms with UL		cULus
UL Type Rating		Туре 12
Conforms with FCC		No
Conforms with IC		No
EAC certificate available		Yes
Conforms with UKCA (Importer)		Yes (WERMA (UK) Ltd.)
Conforms with CMIM		No


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

ļ

KombiSIGN 71 / LED Perm. light ultrabright 644 LED Perm. light ultrabright 24VDC RD

Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

DRAWING

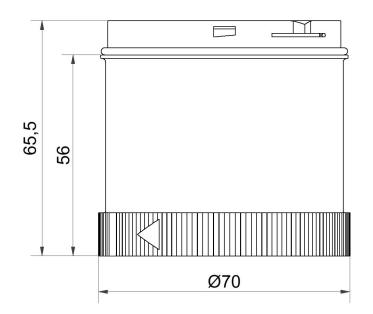

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.