Completely pre-assembled Signal Towers / KOMPAKT 37 K37 plug EM 12VAC/DC YE/RD



ļ

Part No.:	698.230.74		
Series:	Kompakt 37		
MECHANICAL DATA			
Height		141 mm	
Diameter		38 mm	
Materials		PC	
Dome colour		Red Yellow	
Housing colour		Black	
Protection category		IP65	
Connection		M12 plug 5-pole	
Cable entry		Membrane grommet	
Cable entry minimum		d = 1 mm	
Cable entry maximum		d = 9 mm	
Cable length		150 mm	
Tension relief		Pull-out protection	
Type of fixing		Built-in mounting	
Working temperature minimum		-20°C	
Working temperature maximum		+50°C	
Weight with packaging		116 g	
Product weight		77 g	
ELECTRICAL DATA			
Operating voltage		12V	
Operating voltage type		AC/DC	
Operating voltage frequency		50Hz	
Operating voltage tolerance		+/- 10%	
Rated operational voltage		12 VDC	
Rated operational current		205 mA	
Rated inrush current		500 mA	
Protection class		Protection class 2	
Pollution degree		3 In the connection area: 2	
OPTICAL I	ОАТА		
Light sourc	e	LED	
Light colour		Red Yellow	
Optical signal image		Permanent	
Service life optical		50,000 h maximum	
APPROVAL DATA			
Conforms with CE		Yes	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

ļ


Completely pre-assembled Signal Towers / KOMPAKT 37 K37 plug EM 12VAC/DC YE/RD

Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Type 12 Type 4X
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

ļ

Completely pre-assembled Signal Towers / KOMPAKT 37 K37 plug EM 12VAC/DC YE/RD

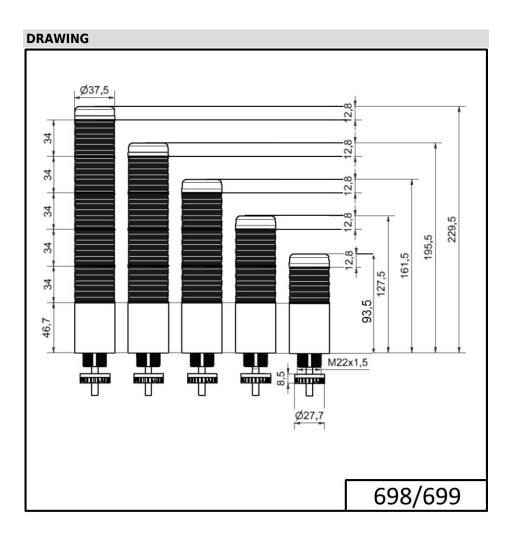

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.