## Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM 12VAC/DC GN/YE/RD



ļ

Part No.:	698.310.74			
Series:	Kompakt 37			
MECHANICAL DATA				
Height			175 mm	
Diameter			38 mm	
Materials			PC	
Dome colour			Clear	
Housing colour			Silver	
Protection category			IP65	
Connection			Cable	
cross-sectional area maximum		num	0,34mm² / 22AWG	
Cable entry			Membrane grommet	
Cable entry minimum			d = 1 mm	
Cable entry maximum			d = 9 mm	
Cable length			2000 mm	
Tension relief			Pull-out protection	
Type of fixing			Built-in mounting	
Working temperature minimum		num	-20°C	
Working temperature maximum		mum	+50°C	
Weight with packaging			196 g	
Product weight			162 g	
ELECTRIC	AL DATA			
Operating voltage			12V	
Operating voltage type			AC/DC	
Operating voltage frequency		cy	50Hz	
Operating voltage tolerance		e	+/- 10%	
Rated operational voltage			12 VDC	
Rated operational current			275 mA	
Rated inrush current			500 mA	
Protection class			Protection class 2	
Pollution degree			3 In the connection area: 2	
OPTICAL D	DATA			
Light source			LED	
Light colour			Green Red Yellow	
Optical signal image			Permanent	
Service life optical			50,000 h maximum	
APPROVA	L DATA			

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.


## Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM 12VAC/DC GN/YE/RD

Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Туре 12 Туре 4Х
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

Provide the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

ļ

Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM 12VAC/DC GN/YE/RD

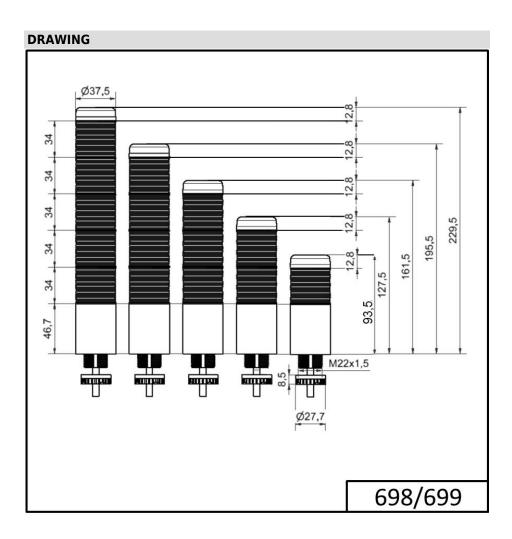

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.