

Completely pre-assembled Signal Towers / KOMPAKT 37

K37cl sr cable EM 12VAC/DC YE/RD



art No.:	698.330.74	$C \in$		c(VL)us	
Series:	Kompakt 37		7	c QL) us	

MECHANICAL DATA			
Height	141 mm		
Diameter	38 mm		
Materials	PC		
Dome colour	Clear		
Housing colour	Black		
Protection category	IP65		
Connection	Cable		
cross-sectional area maximum	0,34mm ² / 22AWG		
Cable entry	Membrane grommet		
Cable entry minimum	d = 1 mm		
Cable entry maximum	d = 9 mm		
Cable length	2000 mm		
Tension relief	Pull-out protection		
Type of fixing	Built-in mounting		
Working temperature minimum	-20°C		
Working temperature maximum	+50°C		
Weight with packaging	90 g		
Product weight	90 g		

ELECTRICAL DATA			
Operating voltage	12V		
Operating voltage type	AC/DC		
Operating voltage frequency	50Hz		
Operating voltage tolerance	+/- 10%		
Rated operational voltage	12 VDC		
Rated operational current	205 mA		
Rated inrush current	500 mA		
Protection class	Protection class 2		
Pollution degree	3 In the connection area: 2		

OPTICAL DATA				
Light source	LED			
Light colour	Red Yellow			
Optical signal image	Permanent			
Service life optical	50,000 h maximum			

APPROVAL DATA	
Conforms with CE	Yes

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

K37cl sr cable EM 12VAC/DC YE/RD


Conforms with RoHS directive	Yes	
WEEE	Yes	
Conforms with ATEX-directive	No	
Conforms with CCC	No	
Conforms with UL	cULus	
UL Type Rating	Type 12 Type 4X	
Conforms with FCC	No	
Conforms with IC	No	
EAC certificate available	Yes	
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)	
Conforms with AS-I	No	
ICAO Certification	No	
Conforms with DNV	No	
Conforms with RoHS CN	No	
Conforms with VdS	No	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

K37cl sr cable EM 12VAC/DC YE/RD

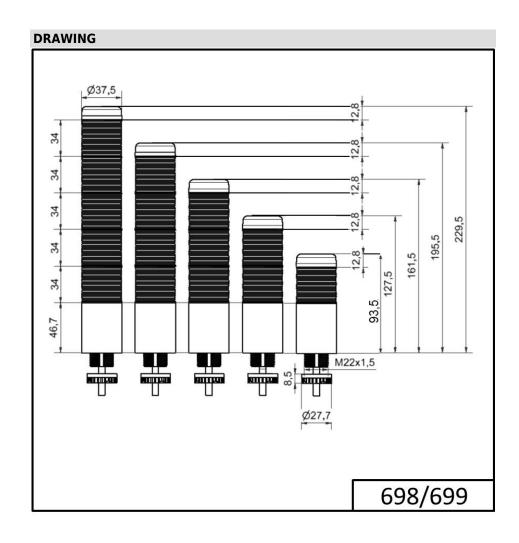

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.