

KombiSIGN 71 / Permanent Beacon 641

## Perm. light element 12-230VAC/DC GN



|           |              |
|-----------|--------------|
| Part No.: | 641.200.00   |
| Series:   | KombiSIGN 71 |



### MECHANICAL DATA

|                             |             |
|-----------------------------|-------------|
| Height                      | 66 mm       |
| Diameter                    | 70 mm       |
| Materials                   | PC          |
| Dome colour                 | Green       |
| Protection category         | IP65        |
| Tension relief              | Not present |
| Working temperature minimum | -20°C       |
| Working temperature maximum | +50°C       |
| Weight with packaging       | 71 g        |
| Product weight              | 57 g        |

### ELECTRICAL DATA

|                        |                          |
|------------------------|--------------------------|
| Operating voltage      | 12-230V                  |
| Operating voltage type | AC/DC                    |
| Protection class       | Protection class 2       |
| Pollution degree       | 3                        |
| Overvoltage category   | II                       |
| Isolation voltage      | Ui = 250V; Uimp = 2.500V |
| Power illuminant       | max.5W                   |

### OPTICAL DATA

|                      |                 |
|----------------------|-----------------|
| Light source         | Filament lamp   |
| Light colour         | Green           |
| Optical signal image | Permanent       |
| Service life optical | depends on bulb |
| Lamp fitting/socket  | B15d            |

### APPROVAL DATA

|                               |                       |
|-------------------------------|-----------------------|
| Conforms with CE              | Yes                   |
| Conforms with RoHS directive  | Yes                   |
| WEEE                          | Yes                   |
| Conforms with ATEX-directive  | No                    |
| Conforms with CCC             | No                    |
| Conforms with UL              | cULus                 |
| UL Type Rating                | Type 12               |
| Conforms with FCC             | No                    |
| Conforms with IC              | No                    |
| EAC certificate available     | Yes                   |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

KombiSIGN 71 / Permanent Beacon 641

## Perm. light element 12-230VAC/DC GN

|                       |    |
|-----------------------|----|
| Conforms with CMIM    | No |
| Conforms with AS-I    | No |
| ICAO Certification    | No |
| Conforms with DNV     | No |
| Conforms with RoHS CN | No |
| Conforms with VdS     | No |

### DRAWING

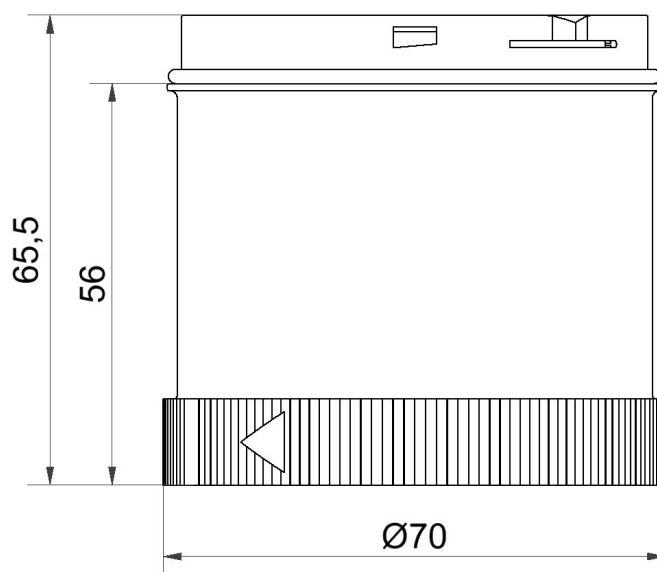

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.