## Midi free-standing Beacons / Rotating Mirror Beacon 885 Rotating Mirror Beacon LED 24VAC/DC YE



!

Part No.: 885.340.75



## **MECHANICAL DATA**

Height200 mmDiameter98 mmMaterialsPC PC/ABSDome colourYellowHousing colourBlackProtection categoryIP65ConnectionScrew terminalscross-sectional area maximum1,50mm² / 16AWGCable entryThrough holeCable entry minimumd = 5 mmCable entry maximum-30 °CWorking temperature minimum+50 °CWorking temperature maximum415 gProduct weight340 gELECTRICAL DATAOperating voltage24VOperating voltage24V		
MaterialsPC PC/ABSDome colourYellowHousing colourBlackProtection categoryIP65ConnectionScrew terminalscross-sectional area maximum1,50mm² / 16AWGCable entryThrough holeCable entry minimumd = 5 mmCable entry maximum-30°CWorking temperature minimum+50°CWorking temperature maximum415 gProduct weight340 gELECTRICAL DATAOperating voltage24V		
PC/ABSDome colourYellowHousing colourBlackProtection categoryIP65ConnectionScrew terminalscross-sectional area maximum1,50mm² / 16AWGCable entryThrough holeCable entry minimumd = 5 mmCable entry maximumd = 7 mmType of fixingTube mountingWorking temperature minimum-30°CWorking temperature maximum+50°CWeight with packaging415 gProduct weight340 gELECTRICAL DATAOperating voltage24V		
Housing colourBlackProtection categoryIP65ConnectionScrew terminalscross-sectional area maximum1,50mm² / 16AWGCable entryThrough holeCable entry minimumd = 5 mmCable entry maximumd = 7 mmType of fixingTube mountingWorking temperature minimum-30°CWorking temperature maximum+50°CWeight with packaging415 gProduct weight340 gELECTRICAL DATAOperating voltage24V		
Protection categoryIP65ConnectionScrew terminalscross-sectional area maximum1,50mm² / 16AWGCable entryThrough holeCable entry minimumd = 5 mmCable entry maximumd = 7 mmCable entry maximumd = 7 mmType of fixingTube mountingWorking temperature minimum-30°CWorking temperature maximum+50°CWeight with packaging415 gProduct weight340 gELECTRICAL DATAOperating voltage24V		
ConnectionScrew terminalscross-sectional area maximum1,50mm² / 16AWGCable entryThrough holeCable entry minimumd = 5 mmCable entry maximumd = 7 mmCable entry maximumd = 7 mmType of fixingTube mountingWorking temperature minimum-30°CWorking temperature maximum+50°CWeight with packaging415 gProduct weight340 gELECTRICAL DATAOperating voltage24V		
cross-sectional area maximum1,50mm² / 16AWGCable entryThrough holeCable entry minimumd = 5 mmCable entry maximumd = 7 mmType of fixingTube mountingWorking temperature minimum-30°CWorking temperature maximum+50°CWeight with packaging415 gProduct weight340 gELECTRICAL DATAOperating voltage24V		
Cable entryThrough holeCable entry minimumd = 5 mmCable entry maximumd = 7 mmType of fixingTube mountingWorking temperature minimum-30°CWorking temperature maximum+50°CWeight with packaging415 gProduct weight340 gELECTRICAL DATAOperating voltage24V		
Cable entry minimumd = 5 mmCable entry maximumd = 7 mmType of fixingTube mountingWorking temperature minimum-30°CWorking temperature maximum+50°CWeight with packaging415 gProduct weight340 gELECTRICAL DATAOperating voltage24V		
Cable entry maximumd = 7 mmType of fixingTube mountingWorking temperature minimum-30°CWorking temperature maximum+50°CWeight with packaging415 gProduct weight340 gELECTRICAL DATAOperating voltage24V		
Type of fixingTube mountingWorking temperature minimum-30°CWorking temperature maximum+50°CWeight with packaging415 gProduct weight340 gELECTRICAL DATAOperating voltage24V		
Working temperature minimum-30°CWorking temperature maximum+50°CWeight with packaging415 gProduct weight340 gELECTRICAL DATAOperating voltage24V		
Working temperature maximum+50°CWeight with packaging415 gProduct weight340 gELECTRICAL DATAOperating voltage24V		
Weight with packaging415 gProduct weight340 gELECTRICAL DATAOperating voltage24V		
Product weight 340 g ELECTRICAL DATA Operating voltage 24V		
ELECTRICAL DATA Operating voltage 24V		
Operating voltage 24V		
Operating voltage type AC/DC		
Operating voltage frequency 50Hz		
Operating voltage tolerance +/- 10%		
Rated operational voltage 24 VDC		
Rated operational current 175 mA		
Rated inrush current <10A		
Protection class Protection class 2		
Pollution degree 3		
Overvoltage category II		
OPTICAL DATA		
Light source LED		
Light colour Yellow		
Optical signal image Revolving		
Service life optical 50,000 h maximum		
Rotation speed (rpm) 180 U/min		
APPROVAL DATA		
Conforms with CE Yes		

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.




## Midi free-standing Beacons / Rotating Mirror Beacon 885 Rotating Mirror Beacon LED 24VAC/DC YE

Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC-Ex	No
Conforms with CCC	No
Conforms with UL	No
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with CMIM	No
Conforms with AS-I	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

Provide the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

ļ

## Midi free-standing Beacons / Rotating Mirror Beacon 885 Rotating Mirror Beacon LED 24VAC/DC YE

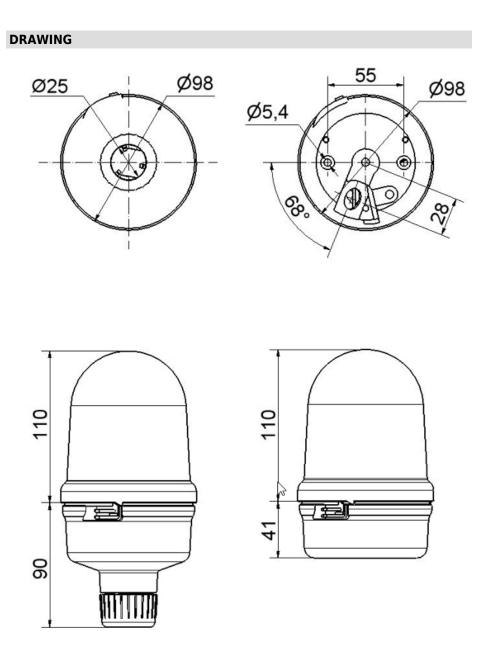

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.