KombiSIGN 71 / Audible Devices 645 Siren element 7 tone 24VDC BK



Series:	645.850.55 KombiSIGN 71	
меснали		
MECHANICAL DATA Height		72 mm
Diameter		70 mm
Materials		PC
Housing colour		Black
Protection category		IP65
Working temperature minimum		-20°C
Working temperature maximum		+50°C
		94 g
Weight with packaging Product weight		
Product we	eignt	77 g
ELECTRIC	CAL DATA	
Operating voltage		24V
Operating voltage type		DC
Operating voltage tolerance		+/- 10%
Rated operational voltage		24 VDC
Rated operational current		80 mA
Rated inrush current		500 mA
Protection class		Protection class 2
Pollution degree		3
ACOUSTI	C DATA	
Volume (max) at 1m distance		98,0 dB (A)
Acoustic service life		5,000 h minimum
		Ma -
Conforms with CE		Yes
Conforms with RoHS directive		Yes
WEEE		Yes
Conforms with ATEX-directive		No
Conforms with CCC		No
Conforms with UL		cULus
UL Type Rating		Type 12
Conforms with FCC		No
Conforms		No
EAC certificate available		Yes
Conforms with UKCA (Importer)		Yes (WERMA (UK) Ltd.)
Conforms with CMIM		No
Conforms with AS-I		No
ICAO Certification		No


Pror additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

!

KombiSIGN 71 / Audible Devices 645 Siren element 7 tone 24VDC BK

Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

DRAWING

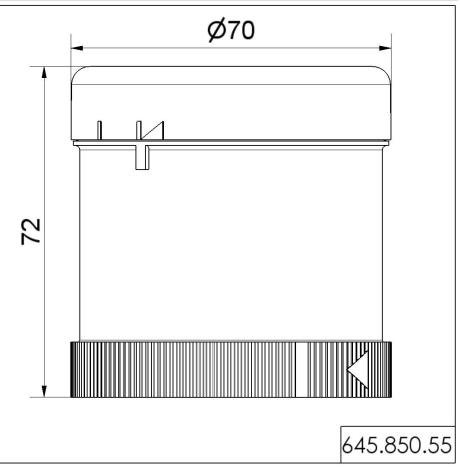

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.